INSTALLATION INSTRUCTIONS
6779-50安裝說明

**6779
SERIES:**

6779-50
Hook

1. Loosen the **Set Screw** from **Main Body** with the provided **Hex Key** to disassemble the **Bracket**.
   用隨附六角扳手鬆開本體上方埋頭螺絲,將固定基座取出。

2. Select a proper position for product and use the **Bracket** as a template to mark centers of mounting holes on wall horizontally as figures shown.
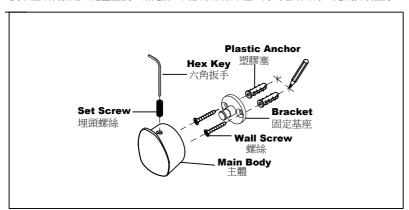   選取預定安裝的位置,以固定基座比對鑽孔的距離,並在牆壁畫上預定鑽孔記號,且確認鑽孔位置在同一水平線上。

3. Using a 6mm drill-bit, drill the holes in marked positions to a depth of 4cm. Insert the **Plastic Anchors** into the holes, and then fix **Bracket** with **Wall Screws**.
   當安裝在水泥牆時,使用6mm鑽頭,鑽孔深度4公分,崁入塑膠塞並使之齊平於牆面,將固定基座以螺絲鎖緊於牆上。

4. Tightly fix **Main Body** on **Bracket** with **Set Screw**.
   使本體順利套進固定基座後,用隨附六角扳手鎖緊本體上方的埋頭螺絲,完成安裝程序。

Plastic Anchor
塑膠塞

Hex Key
六角扳手

Set Screw
埋頭螺絲

Bracket
固定基座

Wall Screw
螺絲

Main Body
主體