


Bath/Shower Faucet
6922-94-80CP



unit: mm[inch]

1. It is not easy to accumulate the filth on the surface based on special inner structure and will increase the life of product.
2. Inlaid fillisters below the handles gives users convenient operation.
3. The switch beneath the body can adjust the water flow either from downward outlet or hand shower and shift to downward outlet automatically when turning off the water, for preventing unaware scald accident.
4. Ceramic cartridge is with MARUWA ceramic disc / Japan.
5. Thread of wall outlet: G1/2.
6. The distance between two centers of wall water-outlet is from 134mm to 176mm.
7. The flow regulator of the spout could adjust the water flow to flat flowing.
8. Brass with Chrome plated finish meets ASTM-SC2 standard.
9. Casting material meets ISO CuZn40Pb Standard.

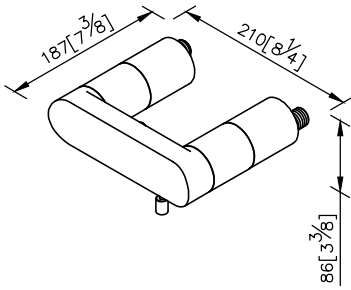